

Technical data sheet

Earth rod for standard applications, copper-coated

Item number: 5450020



- High corrosion resistance
- Copper coating thickness: Min. 250 µm
- With peg and bore for linking together
- Round pegs with two knurls
- Conforms to the requirements according to VDE 0185-305 (IEC 62305)
- Short-circuit current I_k (50 Hz), time 1 s, temp. max. 300 °C: 7.9 kA

St Steel

Cu Copper-plated

Master data

Item number	5450020
Type	219 20 CU
Description 1	Earth rod
Description 2	20 mm Dia x 1 m
Manufacturer	OBO
Dimension	1m
Material	Steel
Surface	Copper-plated
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	264 kg
Weight unit	kg/100 pc.


Technical data sheet

Earth rod for standard applications, copper-coated

Item number: 5450020



Dimensions

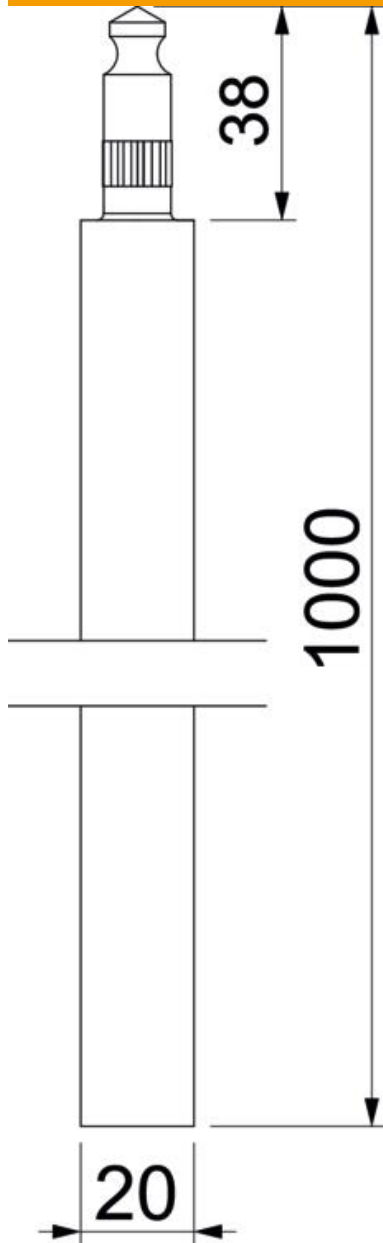

Length	1,000 mm
--------	----------

Technical data

Version for	Miscellaneous
Lightning current carrying capacity	H/100 kA

Technical data sheet

Earth rod for standard applications, copper-coated

Item number: 5450020



Technical data

Profile type	Round D=20 mm
Connection type	With pin/drill hole