Technical data sheet

GES4 service outlet with handle clamp

Item number: 7405204



Service outlet with handle clamp for up to 6 individual Modul 45 devices in 2 UT3 universal supports, use in duct systems and system floors for indoor use.

Up to 4 installation devices with 50 mm central plate can be inserted.

Service outlet with handle clamp, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.





Master data


7405204
GES4 U 1019
Service outlet
for duct mounting
OBO
217x217x61
Grey-beige; RAL 1019
Polyamide
1
Piece
139.5 kg
kg/100 pc.

Technical data sheet

GES4 service outlet with handle clamp

Item number: 7405204



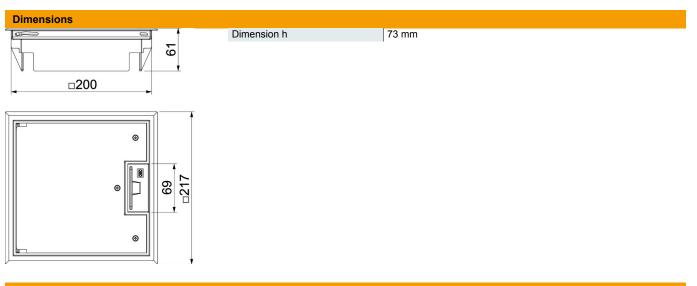

Technical data

Number of installable devices	6
Number of mounting boxes	2
Version for	Square
Cable outlet version	Swivellable cord outlet
Floor covering protection frame	yes
Floor care	Dry
Seal installation option	no
Floor height, min.	72 mm
Suitable for raised floor installati- on	yes
Suitable for screed-flush closed underfloor ducts	no
Suitable for screed-covered un- derfloor ducts	yes
Suitable for cavity floor installation	yes
Suitable for wet care	no
Suitable for underfloor box	250/350
Suitable for underfloor ducts	yes
Device support to accept moun- ting boxes	yes
Length of external dimensions	217 mm
Length of installation dimensions	200 mm
With floor covering recess	yes
Nominal size for device installati- on units	4
Frame version	Carpet protection frame
Protection rating (IP) when used	IP20
Protection rating (IP) when unu- sed	IP40
Protection rating IK code	IK08
Heavy-duty version	no
Vertical load, large area	to 10,000 N
Vertical load, small area	to 3,000 N

Technical data sheet

GES4 service outlet with handle clamp

Item number: 7405204



Technical data

Approvals Opening mechanism Floor covering thickness VDE Handle 5 mm