

# Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type  
GK-53130  
Item number: 6113262



Flat angle for changing the direction of the Rapid 45-2 device installation trunking.



**PVC** Polyvinylchloride

## Master data

|                     |                      |
|---------------------|----------------------|
| Item number         | 6113262              |
| Type                | GK-FS53130LGR        |
| Description 1       | Flat angle           |
| Description 2       | rigid form           |
| Manufacturer        | OBO                  |
| Dimension           | 200x200x130          |
| Colour              | Light grey; RAL 7035 |
| Material            | Polyvinylchloride    |
| Smallest sales unit | 1                    |
| Unit of quantity    | Piece                |
| Weight              | 60.2 kg              |
| Weight unit         | kg/100 pc.           |


# Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type  
GK-53130

Item number: 6113262



## Dimensions

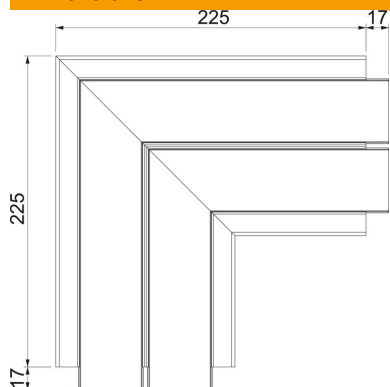

|        |        |
|--------|--------|
| Length | 225 mm |
| Width  | 130 mm |
| Height | 53 mm  |

## Technical data

|                                   |                          |
|-----------------------------------|--------------------------|
| Number of covers                  | 2                        |
| Version for                       | Base and cover           |
| for duct width                    | 130 mm                   |
| for trunking height               | 53 mm                    |
| Halogen-free                      | no                       |
| Cable retaining clip              | no                       |
| Duct connector                    | no                       |
| Cover mounting type               | Internal                 |
| Mounting perforation in base      | yes                      |
| Cover width                       | 45 mm                    |
| Cover width 2                     | 45 mm                    |
| Cover width 3                     | 0 mm                     |
| Change of direction               | Vertical, rising/falling |
| Protection rating                 | IP40                     |
| Protective film                   | yes                      |
| Protection rating IK code         | IK08                     |
| Symmetrical                       | yes                      |
| Permitted temperature range, max. | 60 °C                    |
| Permitted temperature range, min. | -15 °C                   |
| Angle range, max.                 | 90 mm                    |
| Angle range, min.                 | 90 mm                    |