

Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type
GK-53165
Item number: 6113452



Flat angle for changing the direction of the Rapid 45-2 device installation trunking.



PVC Polyvinylchloride

Master data

| | |
|---------------------|----------------------|
| Item number | 6113452 |
| Type | GK-FS53165LGR |
| Description 1 | Flat angle |
| Description 2 | rigid form |
| Manufacturer | OBO |
| Dimension | 200x200x165 |
| Colour | Light grey; RAL 7035 |
| Material | Polyvinylchloride |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 64.5 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type
GK-53165

Item number: 6113452



Dimensions

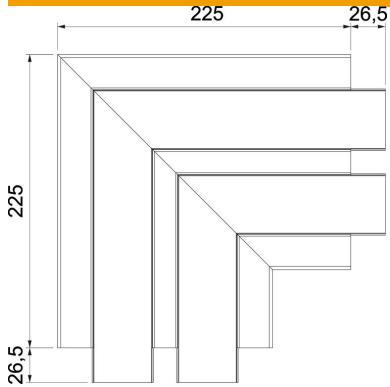

| | |
|--------|--------|
| Length | 225 mm |
| Width | 165 mm |
| Height | 53 mm |

Technical data

| | |
|-----------------------------------|--------------------------|
| Number of covers | 2 |
| Version for | Base and cover |
| for duct width | 165 mm |
| for trunking height | 53 mm |
| Halogen-free | no |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | yes |
| Cover width | 45 mm |
| Cover width 2 | 45 mm |
| Cover width 3 | 0 mm |
| Change of direction | Vertical, rising/falling |
| Protection rating | IP40 |
| Protective film | yes |
| Protection rating IK code | IK08 |
| Symmetrical | yes |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -15 °C |
| Angle range, max. | 90 mm |
| Angle range, min. | 90 mm |