

Technical data sheet

GX cable tray, perforated, FS

Item number: 6480052



GKS 100 GX = perforated cable tray system with 100 mm side height
Magnetic shield insulation without cover 20 dB, with cover 50 dB.



- St** Steel
- FS** Strip galvanized

Master data

Item number	6480052
Type	GKS GX 115 FS
Description 1	Cable tray
Manufacturer	OBO
Dimension	100x150x3000
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	3
Unit of quantity	Metre
Weight	227.34 kg
Weight unit	kg/100 m


Technical data sheet

GX cable tray, perforated, FS

Item number: 6480052



Dimensions

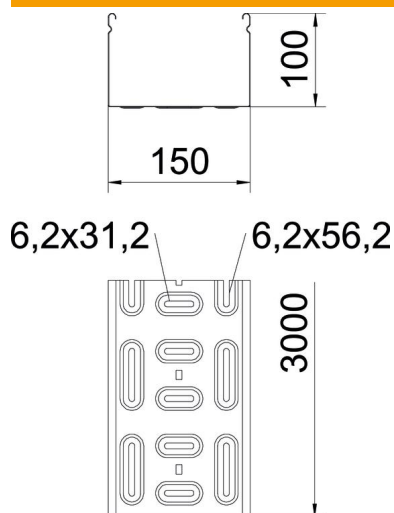

Length	3,000 mm
Width	150 mm
Height	100 mm
Plate thickness	0.9 mm
Dimension B	150 mm
Dimension D	25 mm
Dimension H	100 mm
Dimension L	3,000 mm

Technical data

Walkable	no
Maintain electrical functions	no
With cover	no
Mounting perforation in base	no
Usable cross-section	148 cm ²
Usable cross-section	14800 mm ²
Rustproof steel, pickled	no
Side perforation	yes
Wide-span version	no
Load test type according to IEC 61537	Type II
Type of connector, cable support system	Screwed

Technical data sheet


GX cable tray, perforated, FS



Item number: 6480052

Loads

Support spacing 1.0 m	1.9 kN/m
Support spacing 1.5 m	1.2 kN/m
Support spacing 2.0 m	1.1 kN/m
Support spacing 2.5 m	0.7 kN/m
Support spacing 3.0 m	0.6 kN/m

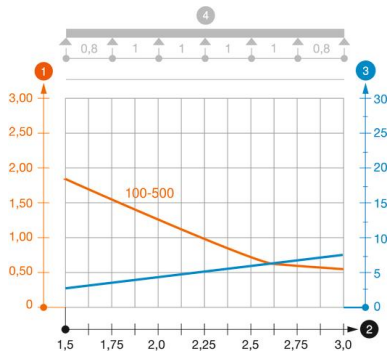

Load diagram, cable tray, type GKS GX100

- 1** Permitted cable tray/ladder load in kN/m without man load
- 2** Support width in m
- 3** Rail bend in mm at permitted kN/m
- 4** Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width