

# Technical data sheet

## Cable ladder LG 50, 3 m FT

Item number: 6487004



Cable ladder with perforated side rail of side height 50 mm with riveted C profile rungs, open in an upwards direction. Assignment of the rungs on both sides possible using U clamps.

Magnetic shield insulation without cover 10 dB, with cover 15 dB.



CE

**St** Steel

**FT** Hot-dip galvanised

### Master data

Item number	6487004
Type	LG 530 VS FT
Description 1	Cable ladder
Description 2	perforated
Manufacturer	OBO
Dimension	50x300x3000
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	3
Unit of quantity	Metre
Weight	281.167 kg
Weight unit	kg/100 m


# Technical data sheet

## Cable ladder LG 50, 3 m FT

Item number: 6487004



### Dimensions

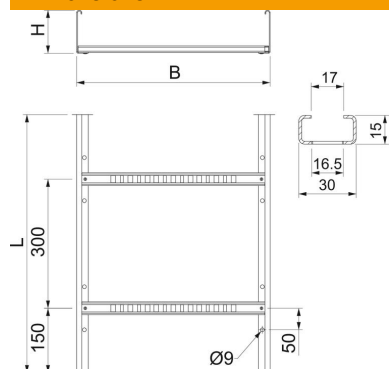

Length	3,000 mm
Length	3,000 ft
Width	300 mm
Height	50 mm

### Technical data

Usable cross-section	90 cm <sup>2</sup>
Usable cross-section	9000 mm <sup>2</sup>
Rung distance	300 mm
Rail thickness	1.5 mm

### Loads

Support spacing 2.0 m	0.7 kN/m
Support spacing 2.5 m	0.5 kN/m
Support spacing 3.0 m	0.35 kN/m