


# Technical data sheet

## PYROMIX® dry mortar in paper sack

Item number: 7206104

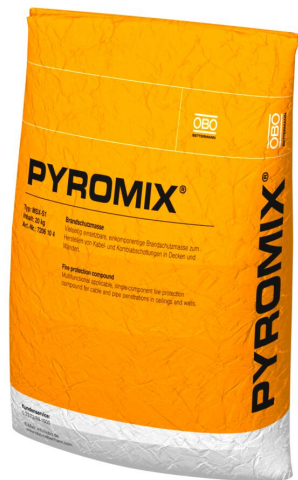

Mortar to create cable and combination insulation in solid walls and ceilings. Suitable for pumping, pressing and for manual installation. Adding approx. 6 litres of water to 20 kg of dry mortar produces about 20 litres of workable compound. For interior application.

In dry, frost-free rooms, the dry mortar can be stored for at least 12 months in closed original containers.



Special mortar

### Master data

|                     |                            |
|---------------------|----------------------------|
| Item number         | 7206104                    |
| Type                | MSX-S1                     |
| Description 1       | Fire protection mortar     |
| Description 2       | for combination insulation |
| Manufacturer        | OBO                        |
| Dimension           | 20kg                       |
| Material            | Special mortar             |
| Smallest sales unit | 1                          |
| Unit of quantity    | Piece                      |
| Weight              | 2000 kg                    |
| Weight unit         | kg/100 pc.                 |

### Technical data

|                         |                   |
|-------------------------|-------------------|
| Fire protection version | Mortar insulation |
| Shape                   | Miscellaneous     |
| Contents                | 20 kg             |
| Accessories required    | no                |