

Technical data sheet

Support cable with universal bracket, galvanic

Item number: 1450407



Support cable with universal bracket for the suspension of different loads. Suitable for indoor use.

Universal bracket for simple wall and ceiling mounting. One bracket side with fastening hole, e.g. for a nail tie, second side with marking for a nail setting device. With cable gripper for infinite, tool-free adjustment.



The operating load is stated with a safety factor of 5:1. The break load is 5x greater than the operating load. In combination with the universal bracket for mesh cable trays (QW GRH) or for cable trays (QW KRH), the safety factor is 1.7 according to IEC 61537 – Guide systems for cables.

- St** Steel
- G** Electrogalvanized

Master data

Item number	1450407
Type	QW UW 2 3M G
Description 1	Suspension wire
Description 2	with universal angle
Manufacturer	OBO
Dimension	2x3000mm
Material	Steel
Surface	Electrogalvanized
Surface standard	EN ISO 19598 / EN ISO 4042
Smallest sales unit	1
Unit of quantity	Piece
Weight	6.538 kg
Weight unit	kg/100 pc.


Technical data sheet

Support cable with universal bracket, galvanic

Item number: 1450407



Dimensions

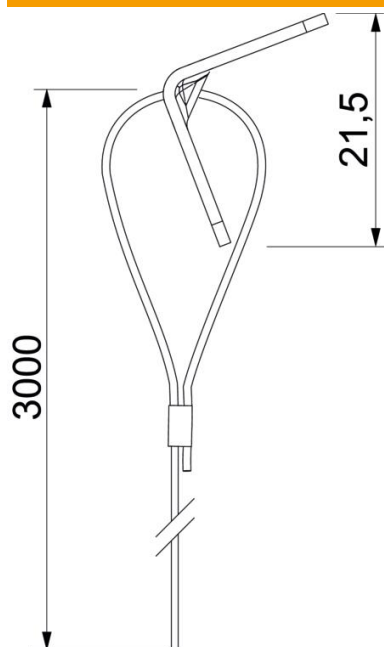

Length	3,000 mm
Dimension L	3,000 mm

Technical data

Operating load	45 kg
Cable diameter	2 mm