


# Technical data sheet

## Cable tray SKS 60 NC FS

Item number: 6056505

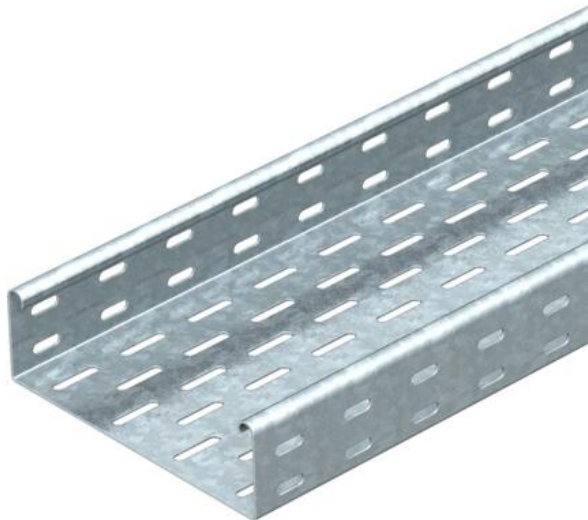

SKS 60 = heavy-duty cable tray system with 60 mm side height.  
Magnetic shield insulation without cover 20 dB, with cover 50 dB.  
Without enclosed connector.



- St** Steel
- FS** Strip galvanized

### Master data

Item number	6056505
Type	SKS 650 NC FS
Description 1	Cable tray SKS
Description 2	perforated
Manufacturer	OBO
Dimension	60x500x3000
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	3
Unit of quantity	Metre
Weight	653 kg
Weight unit	kg/100 m

# Technical data sheet

## Cable tray SKS 60 NC FS

Item number: 6056505



### Dimensions



Dimension	60 x 500
Length	3,000 mm
Length	10 ft
Width	500 mm
Height	60 mm
Height	2 in
Plate thickness	0.06 in
Plate thickness	1.5 mm
Dimension B	500 mm

### Technical data

Connector version	Without connectors
Mounting system fastening type	Floor Ceiling Wall
Base perforation	7 x 32
Maintain electrical functions	yes
Mounting perforation in base	yes
NATO hole pattern	no
Usable cross-section	298 cm <sup>2</sup>
Usable cross-section	298 mm <sup>2</sup>
Rustproof steel, pickled	no
Side perforation	yes
Wide-span version	no
Load test type according to IEC 61537	Type II
Type of connector, cable support system	Screwed

### Loads

Insertable support spacings, min.	1.5 m
Insertable support spacings, max.	3 m
Support spacing 1.5 m	2.65 kN/m
Support spacing 2.0 m	1.8 kN/m
Support spacing 2.5 m	1.15 kN/m
Support spacing 3.0 m	0.5 kN/m