

# Technical data sheet

## US 3 support A2

Item number: 6342409



Suspended support (U profile) of dimensions 50 x 30 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.



**A2** Stainless steel

**2B** Bright, treated

### Master data

Item number	6342409
Type	US 3 K 60 A2
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	50x30x600
Material	Stainless steel
Surface	Bright, treated
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	97 kg
Weight unit	kg/100 pc.


# Technical data sheet

## US 3 support A2

Item number: 6342409



### Dimensions

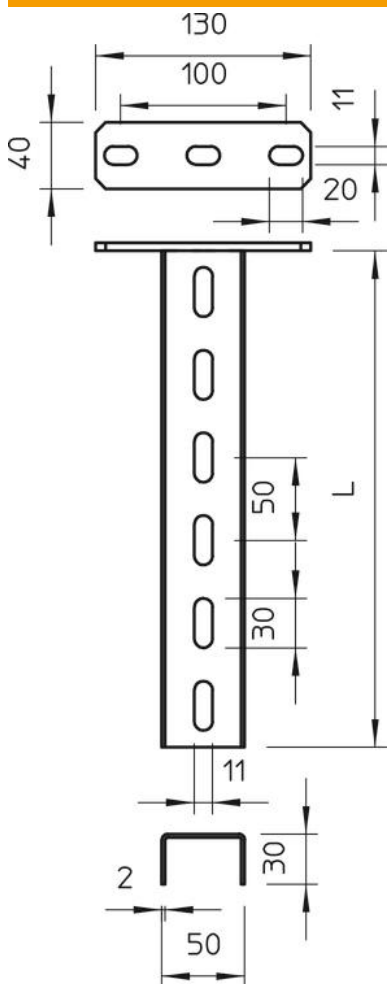

Length	600 mm
Width	50 mm
Height	30 mm

### Loads



### Chara



Max. total  
= 10 cm  
of ETA(a)

### Technical data

Version for	U profile
Bracket length 200	2.1 kN
Bracket length 400	1.1 kN
Maintain electrical functions	no
Material thickness	2 mm
Maximum tensile load	5 kN