Technical data sheet US 5 support FT

Item number: 6341608





U support of dimensions 50×50 mm with welded head plate. For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 45.



St

Steel



Hot-dip galvanised


Master data

Item number	6341608
Туре	US 5 K 90 FT
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	50x50x900
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	1
Unit of quantity	Piece
Weight	261 kg
Weight unit	kg/100 pc.

Technical data sheet US 5 support FT






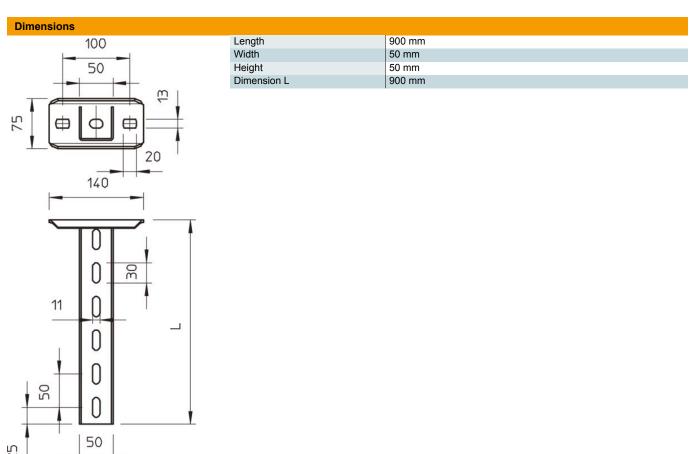

-	ec.	 cal	L CI e	110

Version for	U profile
Bracket length 200	5.75 kN
Bracket length 400	3.1 kN
Bracket length 600	2.2 kN
Maintain electrical functions	yes
Material thickness	2.5 mm
Maximum tensile load	10 kN
With toothing	no



Chara

Max. tota = 10 cm of ETA(a