

# PYROCOMB® Intube




Pipe shells now also with smaller diameters



## In the diameters 60 and 90 mm

- Particularly small insulation solution
- For drill holes with 68 and 100 mm diameter
- Full assignment with cables and electrical installation pipes possible
- Construction product with CE labelling and German approval
- Fire resistance classes to EI120

The pipe shells are closed with 2 foam plugs included in the delivery. The surface seal is created with ASX coating. In some applications, the use of metallic tightening straps is prescribed to secure the pipe shells in light-duty partitions. Details can be found in the mounting instructions/approval.

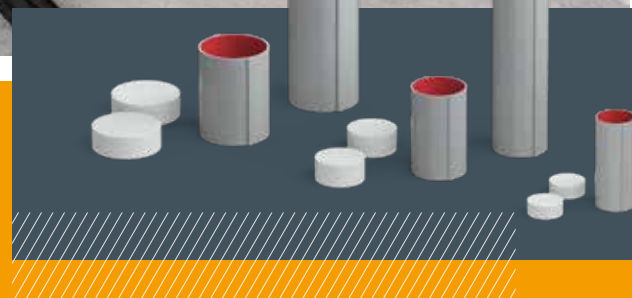

7204290 CTS 06150 **NEW**  
7204292 CTS 09150 **NEW**  
7204296 CTS 09300 **NEW**  
7204300 CTS 12150  
7204304 CTS 12300

Ø60 x 150 mm  
Ø90 x 150 mm  
Ø90 x 300 mm  
Ø120 x 150 mm  
Ø120 x 300 mm

Half-shell still available:  
7204306 CTS-HP200

60 x 200 mm

OBO Bettermann Holding GmbH & Co. KG  
Tel.: +49 (0)2373 89-1700 • E-mail: [export@obo.de](mailto:export@obo.de)  
[www.obo-bettermann.com](http://www.obo-bettermann.com)