


# Technical data sheet

## Cable tray SKS 140 NC FS

Item number: 6061401

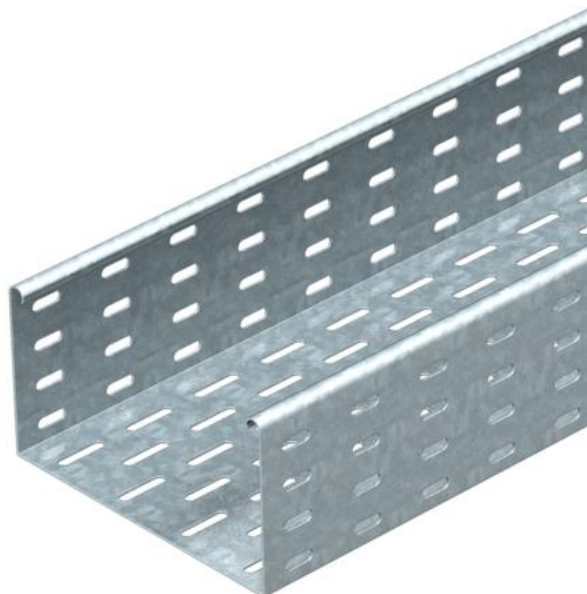

SKS 110 = heavy-duty cable tray system with 110 mm side height.  
Magnetic shield insulation without cover 20 dB, with cover 50 dB.

- St** Steel
- FS** Strip galvanized

### Master data

Item number	6061401
Type	SKS 140 NC FS
Description 1	Cable tray SKS
Description 2	perforated
Manufacturer	OBO
Dimension	110x400x3000
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	3
Unit of quantity	Metre
Weight	660 kg
Weight unit	kg/100 m


# Technical data sheet

## Cable tray SKS 140 NC FS

Item number: 6061401



### Dimensions

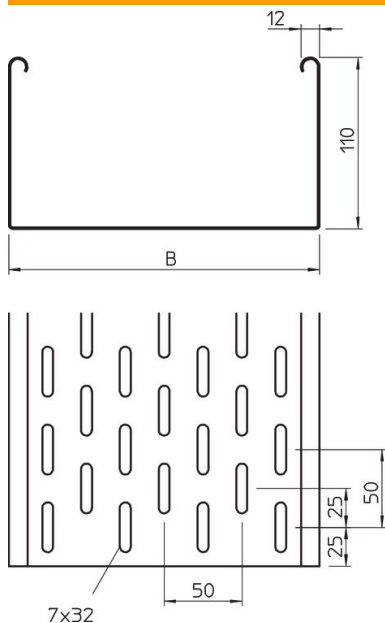

Length	3,000 mm
Length	10 ft
Width	400 mm
Height	110 mm
Height	4 in
Plate thickness	1.5 mm
Dimension B	400 mm

### Technical data

Mounting system fastening type	Floor Ceiling Wall
Maintain electrical functions	no
Mounting perforation in base	yes
NATO hole pattern	no
Usable cross-section	438 cm <sup>2</sup>
Usable cross-section	43800 mm <sup>2</sup>
Rustproof steel, pickled	no
Side perforation	yes
Wide-span version	no
Load test type according to IEC 61537	Type II
Type of connector, cable support system	Screwed

### Loads

Insertable support spacings, min.	1.5 m
Insertable support spacings, max.	4 m
Support spacing 1.5 m	3 kN/m
Support spacing 2.0 m	2.4 kN/m
Support spacing 3.0 m	1.2 kN/m
Support spacing 4.0 m	0.8 kN/m