


# Technical data sheet

## Cable tray SKS 85 NC FS

Item number: 6058605

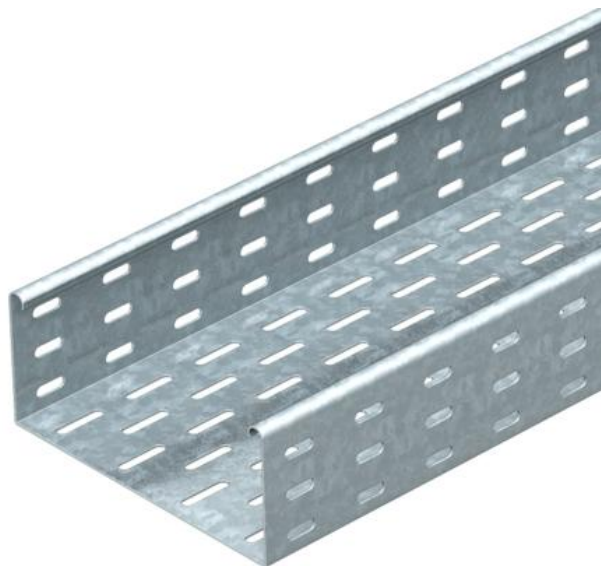

SKS 85 = heavy-duty cable tray system with 85 mm side height.  
Magnetic shield insulation without cover 20 dB, with cover 50 dB.  
SKS cable tray without enclosed connector.

- St** Steel
- FS** Strip galvanized

### Master data

Item number	6058605
Type	SKS 860 NC FS
Description 1	Cable tray SKS
Description 2	perforated
Manufacturer	OBO
Dimension	85x600x3000
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	3
Unit of quantity	Metre
Weight	803 kg
Weight unit	kg/100 m


# Technical data sheet

## Cable tray SKS 85 NC FS



Item number: 6058605

### Dimensions

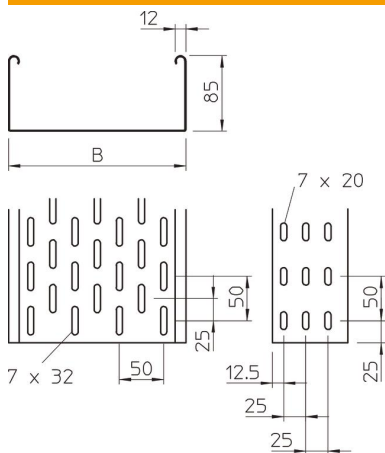

Length	3,000 mm
Width	600 mm
Height	85 mm
Plate thickness	1.5 mm
Dimension B	600 mm

### Technical data

Connector version	Without connectors
Mounting system fastening type	Floor Ceiling Wall
Base perforation	7 x 32
Maintain electrical functions	no
Mounting perforation in base	yes
NATO hole pattern	no
Usable cross-section	508 cm <sup>2</sup>
Usable cross-section	50800 mm <sup>2</sup>
Rustproof steel, pickled	no
Side perforation	yes
Wide-span version	no
Load test type according to IEC 61537	Type II
Type of connector, cable support system	Screwed

### Loads

Insertable support spacings, min.	1.5 m
Insertable support spacings, max.	3 m
Support spacing 1.5 m	2.8 kN/m
Support spacing 2.0 m	2.25 kN/m
Support spacing 2.5 m	1.5 kN/m
Support spacing 3.0 m	0.75 kN/m